
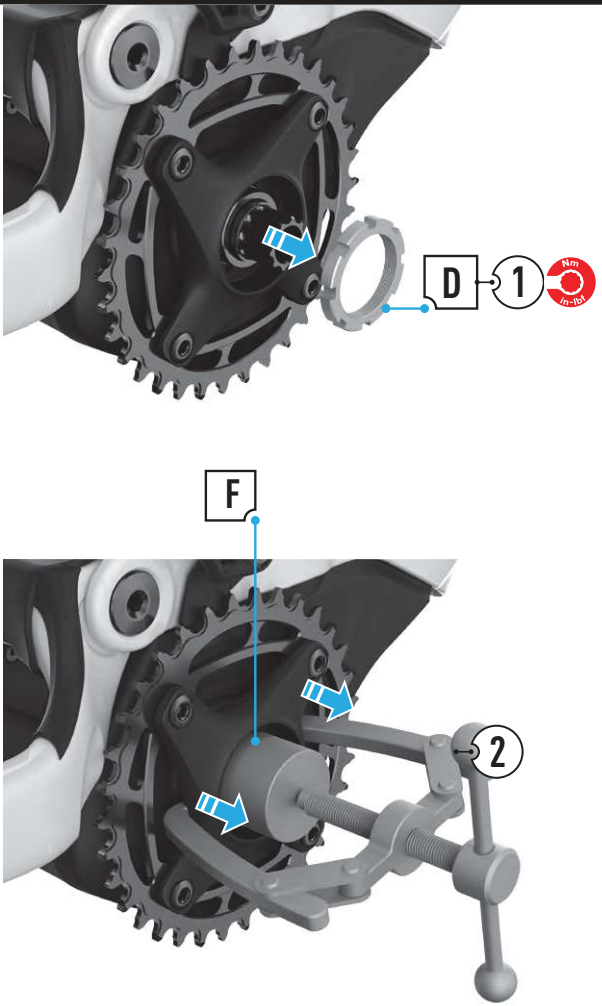


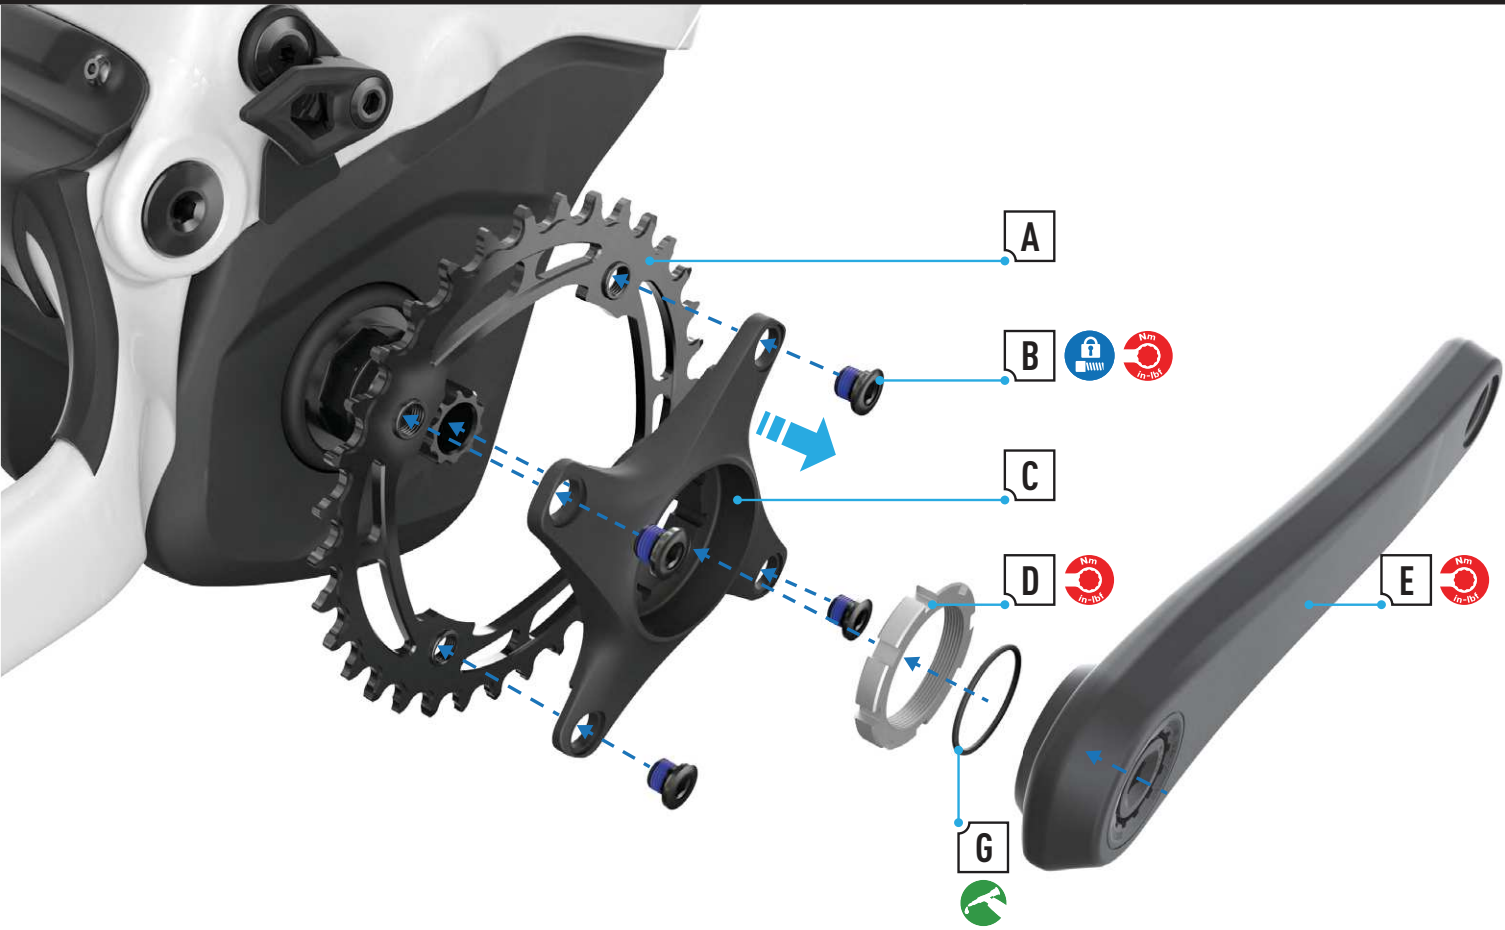

#	PART NAME	PART NUMBER	QTY	SPEC	TOOL	TORQUE		COMMENT
						Nm	in-lbf	
A	Chain Ring	S211400009	1	SRAM EAGLE 34 Teeth 104 mm BCD STEEL EMTB W/BOLTS	N/A	N/A	N/A	
B	Chain Ring Bolts		4		5 mm hex	10	89	
C	Spider	S195100001	1	SPIDER,104 mm BCD	N/A	N/A	N/A	
D	Spider Groove Nut	S166800011	1	Levo ISIS Groove Nut	ParkTool BBT-18 or Shimano TL-UN96	50	443	
E	Crank	VARIOUS		Carbon & Alloy 160 mm	8 mm hex	40	354	Compatible with Levo Gen2; 165 mm Cranks
F	Brose Cap Puller	S175300006	1		N/A	N/A	N/A	
G	O-Ring	S221600011	1	O-RING, 23.5 mm ID x 2.4 mm OD, Drive Side	Grease	N/A	N/A	

- 1: Remove the spider groove nut from the spindle.
- 2: Place the Brose cap puller over motor spindle
- 3: Locate the jaws of the 2-jaw puller under the spider with the screw tip located on the cap.
- 4: By turning the handle on the 2-jaw puller, slowly remove the spider from the spindle.

CRANK CARBON NDS 160 mm	S211600021	CRANK CARBON NDS 165 mm	S211600008
CRANK CARBON DS 160 mm	S211600020	CRANK CARBON DS 165 mm	S211600007
CRANK ALLOY NDS 160 mm	S211600019	CRANK ALLOY NDS 165 mm	S201600022
CRANK ALLOY DS 160 mm	S211600018	CRANK ALLOY DS 165 mm	S201600021