

eBike report



Overview

Total distance 5702 km	Service interval Not available
State of charge of the battery 100 %	Software version Up to date (7/11/2025) ✓
General condition Everything is OK ✓	Errors Everything is OK ✓

eBike information

Product line Performance Line CX BDU450	eBike ID CA15485
Battery lock number T82 5530	Max. speed for support 25 km/h


Dealer information

Address Haywards Heath Cycle Centre 34-36 The Broadway RH16 3AL Haywards Heath	Contact Telephone: +441444457777 E-mail: info@haywardsheathcyclecentre.com Website: www.haywardsheathcyclecentre.com
--	--

eBike statistics


Distance traveled

5702 km

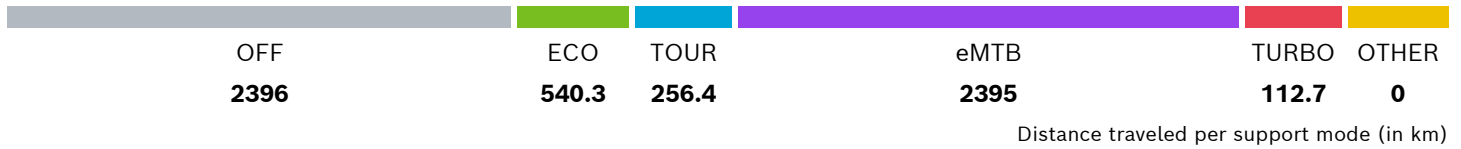


Energy consumption (support modes)

45.54 kWh

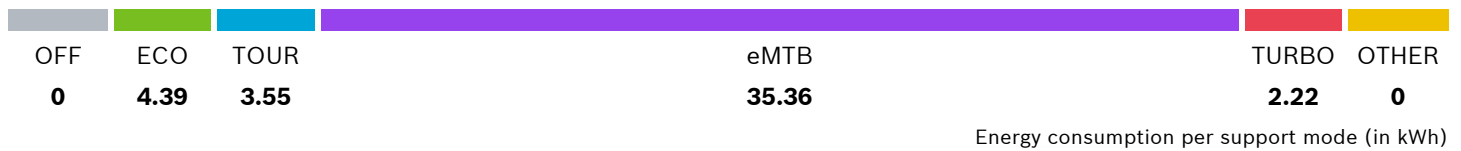

Average energy consumption

7.98 Wh/km

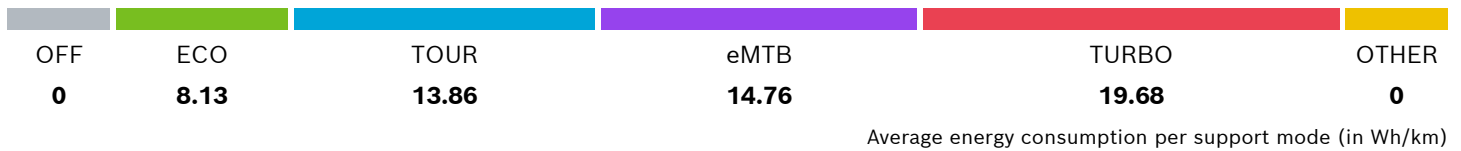

Energy consumption (drive unit)

45.54 kWh



Operating time in support mode

194 h

Total operating time

367 h



Components



Display

Purion



OK

Part number
1270 020 917

Software version
Up to date



Drive unit

Performance Line CX BDU450



OK

Part number
0275 007 074

Software version
Up to date



Battery

PowerTube 500



OK

Part number
0275 007 539

Software version
Up to date

Battery information



State of charge of battery
100 %



Battery voltage
41.5 V



Number of full battery charge cycles
94



Total ampere-hours delivered
1.3 kWh (overall)



Minimum battery temperature
7.0 °C (overall)



Maximum battery temperature
39.2 °C (overall)

Configuration

Speed

Application name: **25kmh_eMTBshortCrank_D
erailleur_75Nm**

Max. speed for support: **25 km/h**

Basic settings

Unit of measurement for length: **Imperial**

Safety

Battery lock number: **T82 5530**

Power Port

High Power Port is activated: **Yes**

Lighting

Lighting setting: **Enabled**

Lighting equipped: **Yes**

Lighting status: **Remember last light
setting**

Lighting power: **3.0 W**

Lighting output: **12 V**

Walk assistance

Walk assistance activated: **Yes**

Gear shift

Max. gear ratio: **3.09**

Wheels

Rear wheel circumference: **2260 mm**

Rear wheel circumference correction: **2260 mm**